


Rubber Support Pad for Solar Mounting Systems

half (20 mm height)

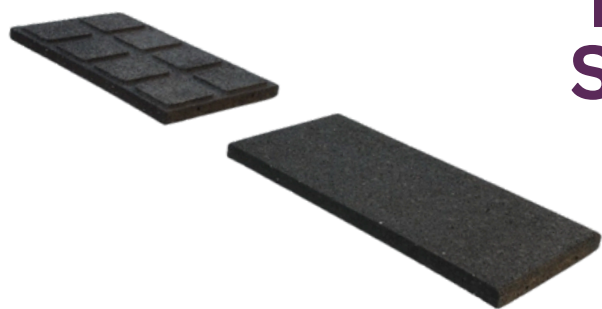

AVAILABLE COLORS:

- Black
- Red
- Green

- Durable and weather-resistant rubber pads designed for ballasted solar mounting systems (flat roofs).
- Protect the roof membrane from pressure and damage.
- Distribute the structural load evenly.
- Reduce vibrations and noise.
- Act as an anti-slip layer to prevent the structure from sliding.

Technical characteristics

Measurments	250x500x20 mm
Wheight	2.15 kg
Raw materials	SBR granules, polyurethane adhesives. Non-toxic
Warranty	2 years
Exploitation	For outdoor and indoor use
Maintenance	Easily washable with water. High-pressure washing is not recommended
Installation	The pads are placed under the supports of ballasted structures. During installation, they ensure roof protection, even load distribution, and reduction of vibrations and noise. Recommended for use on flat roofs with PVC, TPO, EPDM membranes, bitumen coverings, or concrete.